


2.54mm Box Header

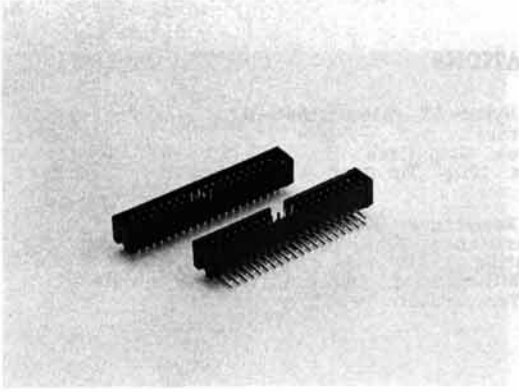

SPECIFICATIONS

Materials

Insulator: PBT & 30% Glass Fiber(UL94V-0)
 Contact: Brass
 Contact Plating: 1 μ " gold plating

Electrical

Insulator Resistance: 1000M Ω min. at DC 500V
 Contact Resistance: 30m Ω max. at DC 100mA
 Current Rating: 1 AMP
 Dielectric Voltage: AC 500V For one minute
 Operating Temperature: -55°C ~ 105°C

No. of contacts	A	B	C
10	20.30	18.10	10.16
14	25.38	23.18	15.24
16	27.92	25.72	17.78
20	33.05	30.80	22.86
26	40.68	38.42	30.48
30	45.70	43.50	35.56
34	50.80	48.58	40.64
40	58.40	56.20	48.26
50	71.10	68.90	60.96
60	83.80	81.60	73.66
64	89.10	86.68	78.74

